

www.auraadesign.co.uk

ELEGANTE Desk

Elegante

Glossy acrylic finishes and chromed details make the Elegante collection chic. Managerial environments and dynamic meeting rooms with an image.



Elegante SYNOPTIC GRID

h 74 cm

* w. 200 cm also with d. 100 cm











w 80÷200 cm d 60 cm w 160÷200 cm d 80 cm w 180÷200 cm d 100 cm w 140 cm d 80 cm w 80÷120 cm d 60 cm

s 1,2-1,8-3,8 cm


h 2 cm

h 30 cm














w 70 cm d 50 cm

w 118,5-138,5-158,5 cm d 1,8 cm


w 98,5-118,5-138,5 cm d 1,8 cm


w 167,8 cm d 56,2 cm

h 54 cm

h 58.5 cm

h 54 cm











w 209,5 cm d 56,2 cm w 44,3 cm d 56,2 cm w 127,7 cm d 56,2 cm

h 73,7 cm

h 124,9 cm

















w 102,4 cm d 46 cm w 202,4 cm d 46 cm w 102,4 cm d 46 cm w 202,4 cm d 46 cm

Elegante SYNOPTIC GRID

h 74 cm

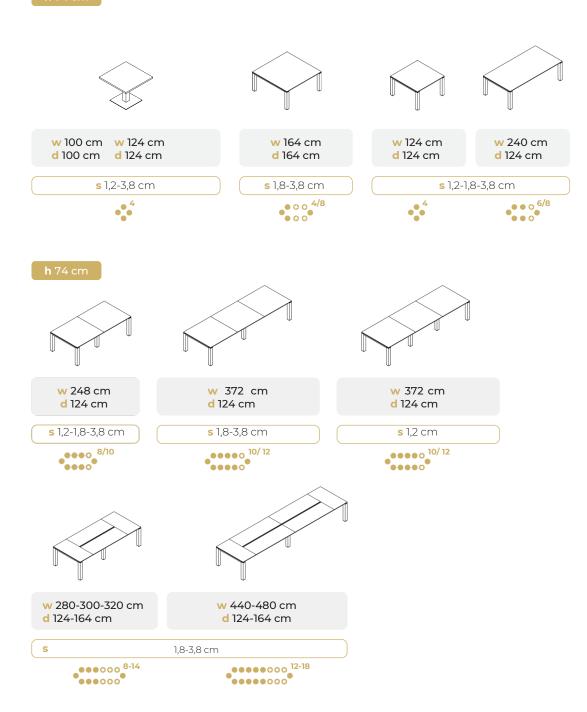

Elegante TECHNICAL FEATURES

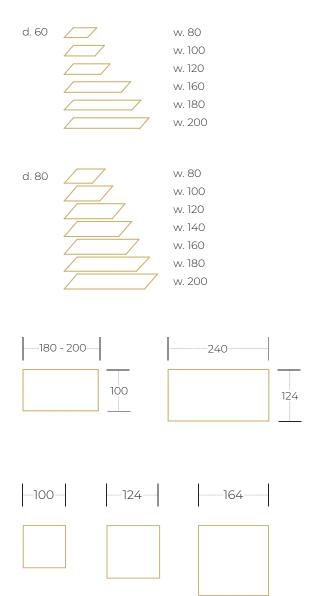

• Melamine top:

made of 18 - 38 mm thick chipboard covered with decorative paper impregnated with melamine resins, edged on the perimeter with 2 mm thick solid abs.

Rounded, 2 mm radius.

Density 620 Kg / m 3

Formaldehyde emission class Carb phase II


Fire reaction class: 2.

· Glass top:

made from 12 mm-thick toughened glass with a shiny rounded edge; the surface below is sanded or can be lacquered in various colours. The glass tops are fixed to the structure using suction cups.

· Veneer tops:


they are made from 18-mm thick chip board panels (density 650Kg/m³ E1, CARB PH 2/TSCA Title VI. Panels with low formaldehyde emission, less than 50% of class E, according to UNI EN standards. Fire reaction class Ds2, d0 – Dfl-S1) covered on both sides with 0.6 mm veneer panels, the entire perimeter has 2 mm rounded s olid wood edging. The tops are initially touched-up and subsequently painted using an antiglare polyester paint (<40 gloss) and oven dried using an UV system..



· Beams:

the legs are connected by a pair of telescopic or fixed beams made with 40 x 40 mm square section drawn tubes. At the ends of the beams are inserted the hooking elements to the portal legs in transparent abs; the extension of the telescopic beams varies from 800 to 1000 mm. from 1000 to 1200 mm. from 1200 to 1800 mm. from 1800 to 2400 mm. The extension of the fixed beams is 1400 mm. - 1600 mm. - 1800 mm. - 2000 mm.

Elegante TECHNICAL FEATURES












• Bridge legs:


made from 2 mm-thick drawn steel tubes, 70x30 mm with shiny chrome galvanic bath finish to which 2 square shaped legs, 10x10 cm are connected, and made from shiny acrylic white or black 90 gloss material obateind with folding technology. The intermediate support legs at the center of the meeting tables are positioned further back to allow use of the entire top surface. The readily serviceable closing panels to route the cables are optional. All the legs are equipped with levelling feet of approx. 1 cm fastened to a chromed square base plate with the same section of the legs.

Elegante CONSTRUCTION FEATURES









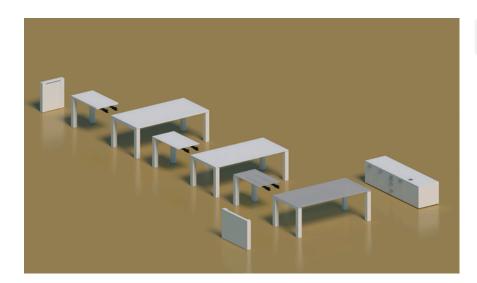


• Desks abacus:

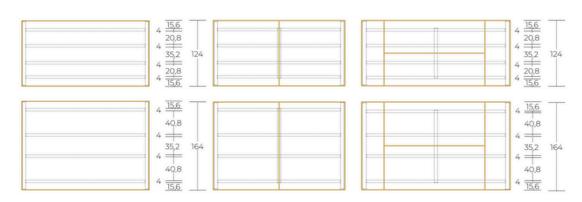

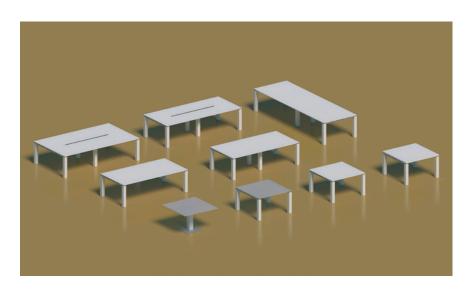

• Bench abacus

Elegante COMPONIBILITY



• Desk with hanging return:

is an add-on module 60/80 cm deep fixed to the main desk by means of molded joints in glassfilled ABS and steel plates.

N 2 clips are also supplied which, hooked to the beams, guarantee the coplanarity of the tops.







• Bridge desk on service cabinet:


80/100 cm deep desk that lays on a service unit. They can be mounted both on the right and on the left. Containers with different dimensions with no pre-holes on the top. The user can choose position of the desk to his liking.

End leg can be:


- · total bridged;
- \cdot one reduced leg.

During assembly, the legs can be placed simply or fixed after drilling the furniture on site using a metric screw.

Elegante ACCESSORIES







Modesty panels:

made of 18 mm thick melamine (density 620 kg / mc class and 1 with low formaldehyde emission according to CARB standards, fire reaction class 2). The modesty panels have side brackets that hook onto the beam with a clamp.

· Leather desk pad:

Elegante DESKTOP ELECTRIFICATION



Square grommet plug



Round cable grommet



Versapad n.1 USB "A", n.1 USB "C" n.1 electric socket



Wireless charger



Plastic top access



Socket block for n.1 USB "A", n.1 USB "C" n.3 electrical sockets



Double-sided top access



USB charger n.2 USB

Elegante UNDER DESKTOP ELECTRIFICATION



Cable tray in chrome



Vertebra cable guide with brush strip and base



Cable tray metal sheet




Cable vertebra



Fabric cable vertebra

Pedestals and service modules • SYNOPTIC GRID

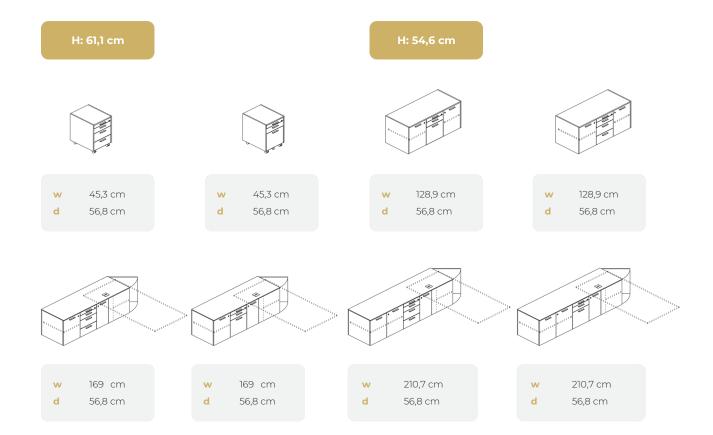

Pedestals and service modules • TECHNICAL FEATURES



• Pedestals and service modules:


structure made of 18 mm thick chipboard (weight 620 Kg per m³, class E1 with low formaldehyde emission, class 2 fire reaction according to ISO standards). Frontals, sides and top are made of 18 mm thick chipboard, coated with a gloss 90 black or white acrylic material (weight 620 Kg per m³, class E1 with low formaldehyde emission, class 2 fire reaction according to ISO standards). The edge along the perimeter sides is 1 mm thick – 2 mm radius rounded ABS. The drawer fronts have chromed plastic material handles; the lock is a cylindrical Yale flat type with 2 keys and shock-resistant foldable handle. The drawers, applied with metal roller guides and slow closure, are made of folded sheet metal with an 8/10 thickness and painted with epoxy powders. Appropriate drilling along the side edges allows the installation of optional accessories, such as horizontal separators and oblique paper holder separators. The drawers are equipped with 6 cm diameter chromed swivel wheels with black tread, 2 of which with a brake; the filing cabinets have the 5th wheel with a function to prevent overturning; the metallic guides of the tray are ball-shaped with total extraction slow closure. 33 and 39 cm files can be hung from the file hanger frame. Drawer closure is simultaneous through a vertical metal rod with pre-set notches. Equipped with the standard anti-tilt system.

· Service modules:


body made of 18 mm thick chipboard (weight 620 Kg per m³, class E1 with low formaldehyde emission, class 2 fire reaction according to ISO standards) equipped with Ø52 x h.18 mm feet with adjustable foot inside the furniture, edged on 4 sides with melamine paper. All coatings, fronts, doors, structural backs and top are 18mm thick 90 gloss acrylic edged along the perimeter in 1 mm thick gloss ABS with 2 mm radius. The tops are positioned once the chosen composition has been combined. The doors are fitted with anticorrosion treated hinges with an opening of 105° and soft slow closure, the locks are a cylindrical Yale type with articulated key grip. The handles are made of ABS with KR finish. The drawers are applied with guides or with simple sliding extraction on selflubricating wheels with soft closure or telescopic extraction metal guides with integrated soft closure for filing cabinets, equipped with anticorrosion treated ball carriage, made of folded sheet metal with an 8/10 thickness and painted with epoxy powders. A stationary drawer is always supplied (apart from furniture without a lock), equipped with simple sliding extraction guides on small selflubricating wheels. Appropriate drilling along the side edges allows the installation of optional accessories, such as horizontal separators and oblique file holder separators. 33 and 39 cm files can be hung from the file hanger frame. The furniture can also be positioned on 6 cm diameter swivel wheels, 2 of which with a brake; The filing cabinets have the 5th wheel with a function to prevent overturning. The furniture can also be positioned on 6 cm diameter swivel wheels, 2 of which with a brake. Some compositions are equipped with a technical module with CPU port and cable passage designed to hang under the desk to make maximum use of less accessible areas.

Pedestals and service modules • CONSTRUCTION FEATURES


· Internal measurements

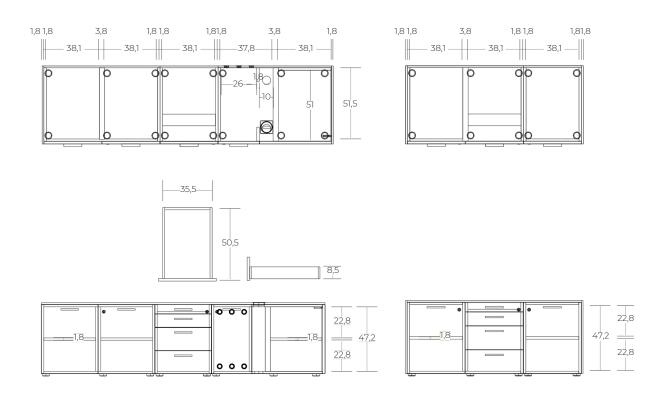

6.4. Pedestals and service modules • ACCESSORIES

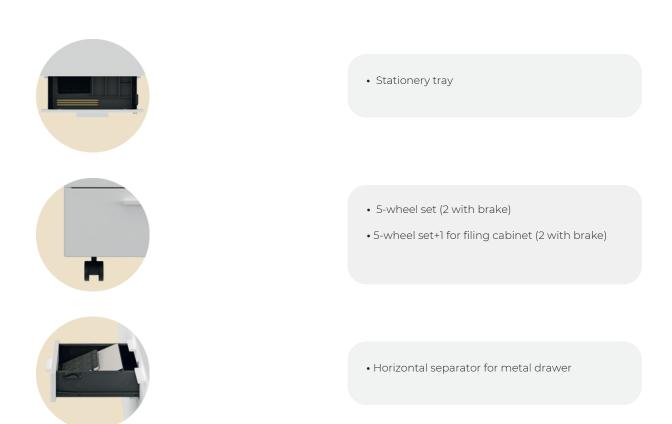

Credenza · SYNOPTIC GRID

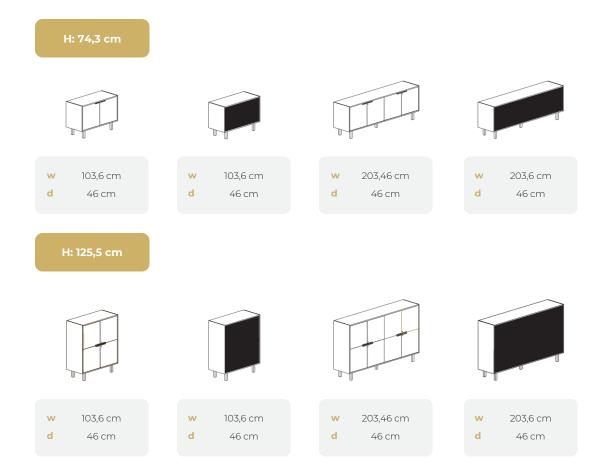


Credenza • TECHNICAL FEATURES


· Credenza:

body made of 18 mm thick chipboard (weight 620 Kg per m³, class E1 with low formaldehyde emission, class 2 fire reaction according to ISO standards) equipped with Ø52 x h.18 mm feet with adjustable foot inside the furniture, edged on 4 sides with melamine paper. All coatings, fronts, doors, structural backs and top are 18mm thick 90 gloss acrylic edged along the perimeter in 1 mm thick gloss ABS with 2 mm radius. The tops are positioned once the chosen composition has been combined. The doors are fitted with anticorrosion treated hinges with an opening of 105° and soft slow closure, the locks are a cylindrical Yale type with articulated key grip. The handles are made of ABS with KR finish. Glass doors: made of 4 m back-coloured glossy tempered glass, equipped with polished extruded aluminium perimetrical frame; no locks can be mounted on these doors and the hinges are easy to adjust and made of corrosion resistant metal, with spring closure and 105° soft opening. The furniture is positioned on an 18 mm thick melamine base, supported by feet made of chrome-coloured 40x40xh. 195mm square ABS.

Credenza • TECHNICAL FEATURES

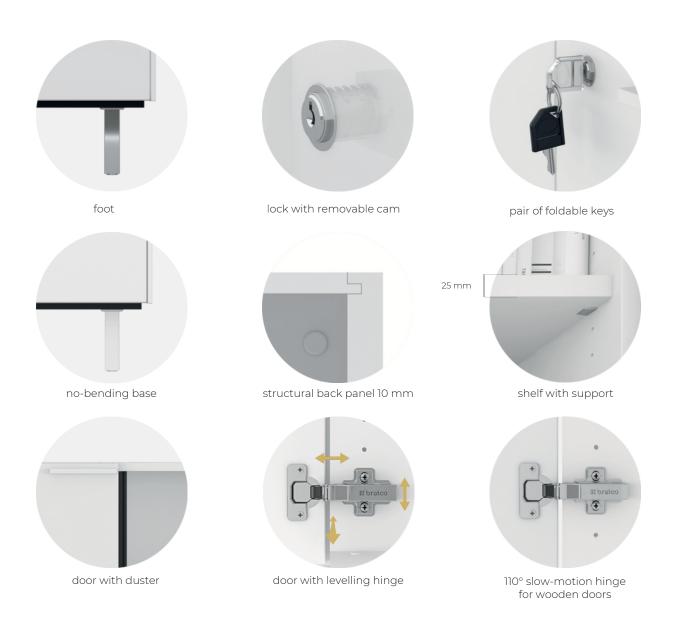


Credenza · CONSTRUCTION FEATURES

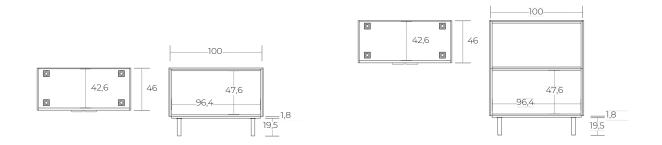

Elegante FINISHES


STRUCTURE



Metal



LEVELLING FOOT



Plastic



TOPS, LEGS, MODESTY PANEL



• Melamine (only tops, modesty panel)




Veneer (only tops, modesty panel)



Glossy acrylic (only legs, modesty panel)



· Glass (only tops)



8.2. Service modules • FINISHES





- **HANDLES**



• Melamine (only internal frame)




Glossy acrylic




Metal (handles)




• Plastic (handles)



Credenza · CONSTRUCTION FEATURES

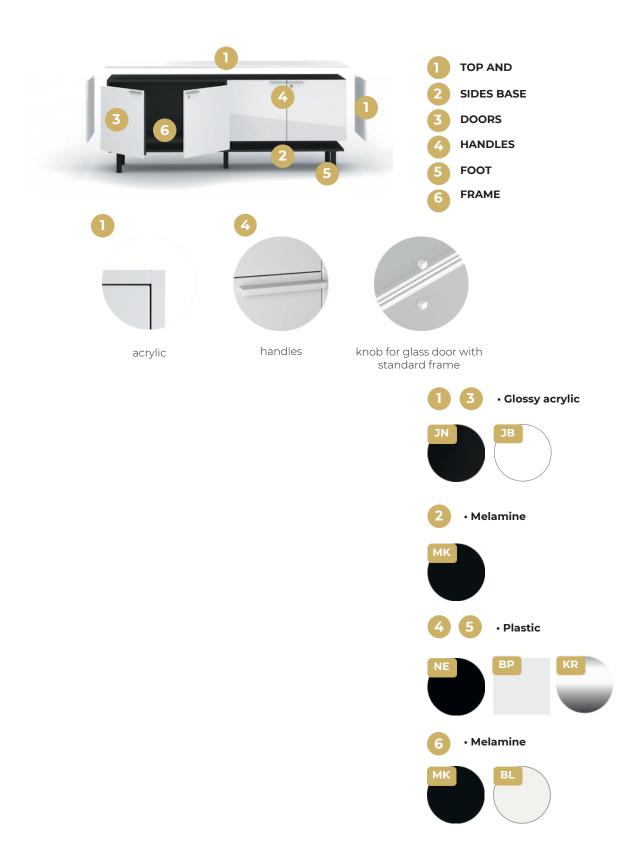

Credenza · FINISHES

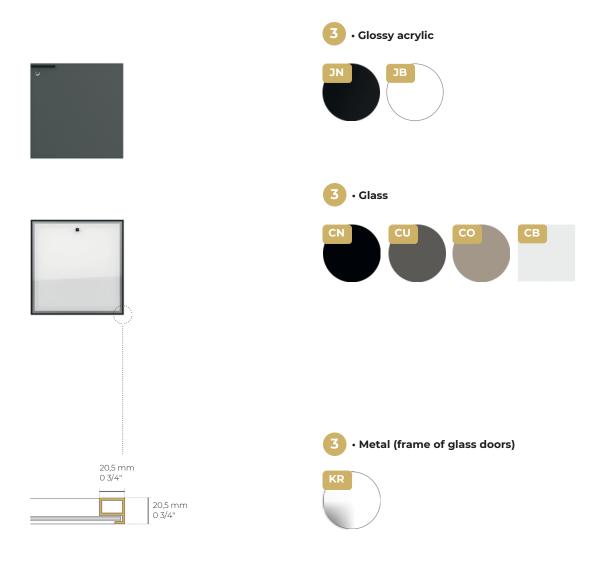

design







